


PMG 08 LAN controlled pulse pattern generator system

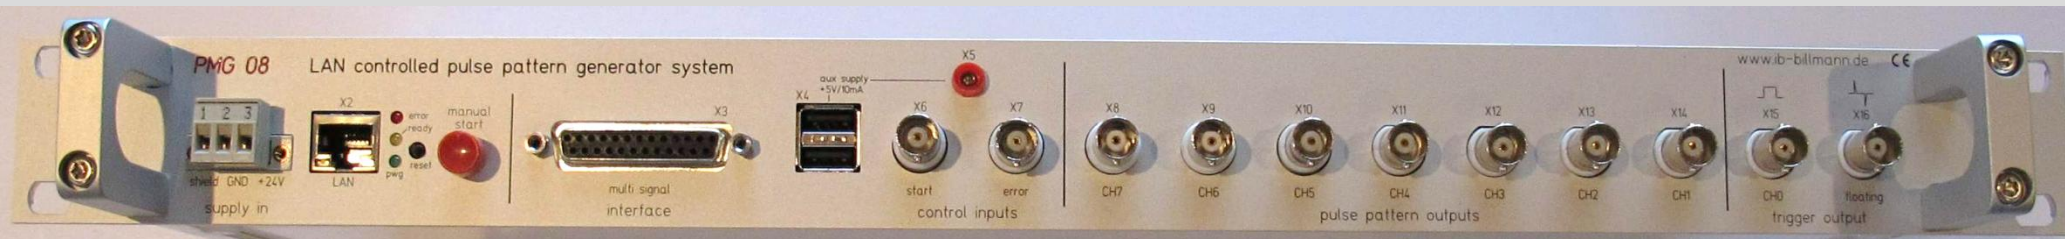

Dynamic Characterization of Semiconductors

- eight synchronized output channels up to 15V
- arbitrary programming in 10nsec steps 512kB
- error input for fast shutdown
- ready for fiber optical interfaces
- full remote by SCPI style commands
- rear panel control for discharge, HV-enable, door lock,...

PMG 08

the alternative to established manual operation lab desk solution

PMG 02A

